

LC-TOSA 10G 1310nm FP Without Isolator

OSMLC-F10AD20

Features

- ◆ Direct modulated and uncooled operation at 1310nm wavelength
- ◆ High-stability MQW-FP laser Diode
- ◆ Coaxial LC TOSA package
- ◆ Up to 10 km



Applications

- ◆ Supports performance up to 10 Gb/sec bit rate, -45°C to $+85^{\circ}\text{C}$ operating
- ◆ 10 Gigabit Ethernet
- ◆ LR1 SONET/ SDH OC-192/ STM-64

1、 Absolute Maximum Ratings

(Unless specified else, the specifications below are defined at $T_C=25\pm 3^{\circ}\text{C}$)


Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	Tstg	-40	100	$^{\circ}\text{C}$
Operating Case Temperature	Topr	-40	85	$^{\circ}\text{C}$
Reverse Voltage(LD)	V_{RL}	---	2	V
Reverse Voltage(PD)	V_{RD}	---	6	V
Photodiode Forward Current(PD)	I_{FD}	---	1	mA
Forward Current (LD)	I_{LD}	---	100	mA
Lead Soldering (Temperature)/(Time)	---	---	260/10	$^{\circ}\text{C}/\text{Sec}$

2、Electrical and Optical Characteristics


(Unless specified else, the specifications below are defined at TC=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note	Inspection
Output Optical Power	Pf	0.3	---	0.8	mW	CW, Iop=Ith+25mA,	100%inspection
Threshold Current	Ith	---	9	15	mA	Tc=25±3°C	100%inspection
Peak Wavelength	λp	1290	1310	1330	nm	CW	---
Spectral Width	Δλ	---	---	2.0	nm	(-20dB)	---
Operating Voltage	Vop	---	1.9	2.1	V	CW, Iop=Ith+25mA,	100%inspection
Monitor Current	Im	0.1	---	1.0	mA	CW, Iop=Ith+25mA,	100%inspection
Monitor Dark Current	Id	---	---	0.1	μA	VR=5V	---
Rise/Fall Time	Tr/ Tf	---	50	---	ps	20%~80%	---
Tracking Error	TE	-1.5	---	1.5	dB	Iop=Ith+25mA, -40°C/+25°C, +25°C/+85°C	---

3、 Package Dimension/ Pin Package Drawing: (unit: mm)

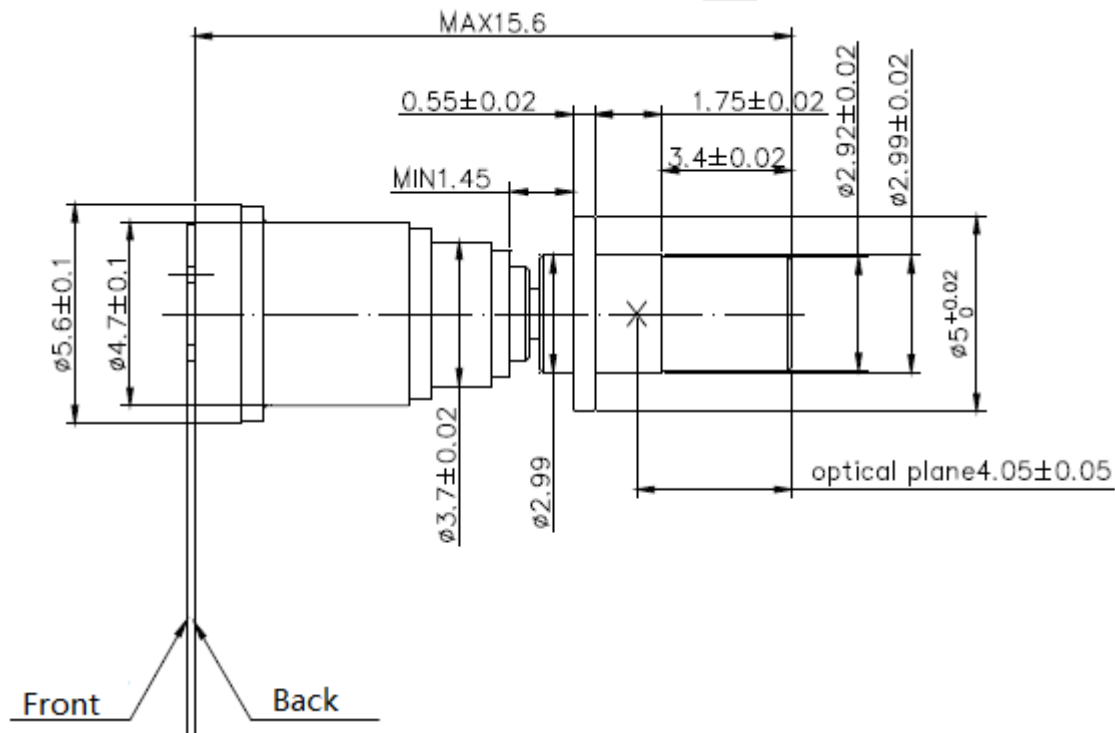

FPC

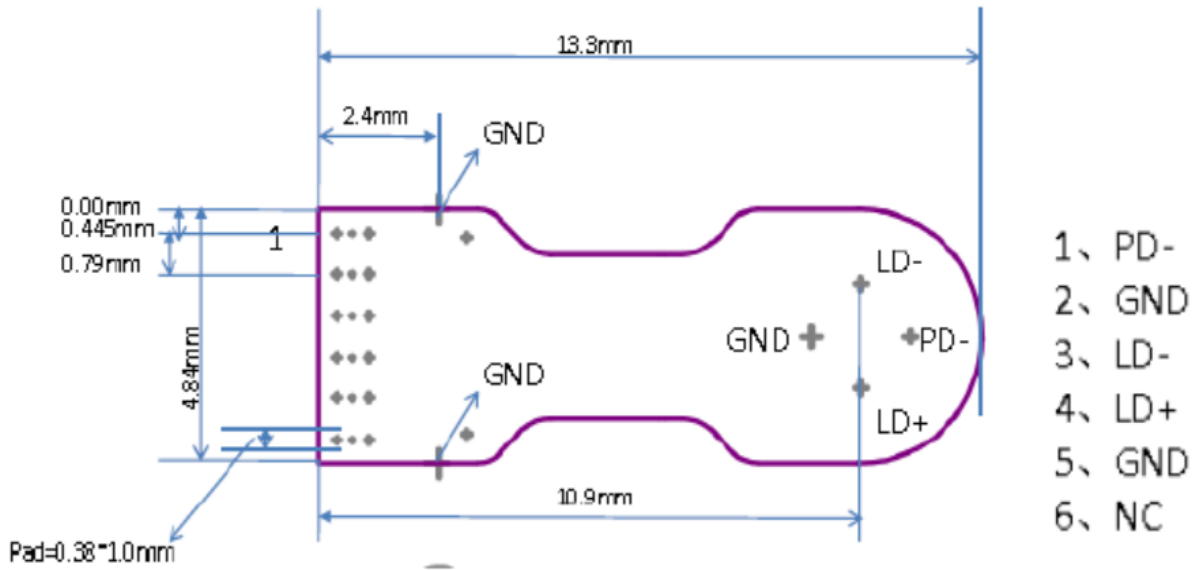

Notice

OSM reserves the right to make changes or discontinue any product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the products are for illustrative purposes only. OSM makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.